

# TECHNICAL SPECIFICATIONS

# S SERIES



Distributed by Digizoo

## 60"

## 70"

### Panel

<b>Optimum Resolution</b>	Full HD 1080p@60Hz	Full HD 1080p@60Hz
<b>Back Light Unit</b>	E-LED	E-LED
<b>Response Time</b>	4ms (Typical)	8ms (Typical)
<b>Viewing Angle</b> (Horizontal/Vertical)	176° / 176°	176° / 176°
<b>Contrast Ratio</b>	4500 : 1 (Typical)	4000 : 1 (Typical)
<b>Brightness</b>	350cd/m2 (Typical)	350cd/m2 (Typical)

### Touch

<b>Touch Technology</b>	IR	IR
<b>Simultaneous Touch Points</b>	20	20
<b>Touch Accuracy</b> (Middle/Edge)	+2mm/+4mm	+2mm/+4mm
<b>Response Time</b>	<10ms	<10ms
<b>Touch Compatibility Supported OS (Multi)</b>	Windows 7, 8, 8.1, Android	Windows 7, 8, 8.1, Android
<b>Touch Compatibility Supported OS (Single)</b>	Win XP, Vista, Windows 7, 8, 8.1, Linux, Android, Mac, Chrome	Win XP, Vista, Windows 7, 8, 8.1, Linux, Android, Mac, Chrome

### External Android Option

<b>Chipset</b>	RK3288	RK3288
<b>Core</b>	Cortex A17 Quad Core	Cortex A17 Quad Core
<b>GPU</b>	Mali T764	Mali T764
<b>OS Version</b>	Lollipop 5.1	Lollipop 5.1
<b>RAM/Storage</b>	2GB/8GB	2GB/8GB


### Glass

<b>Glass Hardness</b>	9Mohs	9Mohs
<b>Monster Glass (AG/AF)</b>	Yes (Option)	Yes (Option)
<b>Thickness</b>	4mm	4mm

### Accessories



AC Power Cable



HDMI Cable




Remote Control



Touch Sensor USB Cable



Stylus



D3 Quick Manual



## 60"

## 70"

### Connectivity

HDMI 2.0	-	-
HDMI (MHL)	-	-
HDMI	2	2
Display Port	1	1
Touch Sensor USB	1	1
USB Update	1	1
USB 2.0	1	1
USB 3.0	(Via EZ OPS Option)	(Via EZ OPS Option)
Gigabit WAN	(Via EZ OPS Option)	(Via EZ OPS Option)
Gigabit LAN	(Via EZ OPS Option)	(Via EZ OPS Option)
VGA Input	1	1
Video Component	1	1
A/V	1	1
Sound Bar Input	-	-

### Mechanical

Outline Dimensions	1430mm x 854mm x 81mm	1635mm x 967mm x 85mm
Packaged Outline Dimensions	1615mm x 990mm x 310mm	1845mm x 1130mm x 310mm
Product Weight	58.4kg	76.7kg
Gross Weight	68.4kg	89.7kg
Installation Type	Stand, Wall Mount	Stand, Wall Mount
Mount Type	VESA 400(H) x 400(V)	VESA 400(H) x 400(V)
Power Input Range	100V~240V~	100V~240V~
Viewing Orientation	Landscape Only	Landscape Only
Regulatory Approval	CE, RoHS Green Compliant	CE, RoHS Green Compliant
Manufacturer's Warranty	2 Years	2 Years

### Environmental

Operating Temperature	0°C~40°C	0°C~40°C
Storage Temperature	-10°C~60°C	-10°C~60°C
Operating Humidity	20%~80%	20%~80%
Storage Humidity	10%~90%	10%~90%

# TECHNICAL DRAWINGS

# S SERIES





Distributed by Digizoo

### Front View

### Rear View

60"

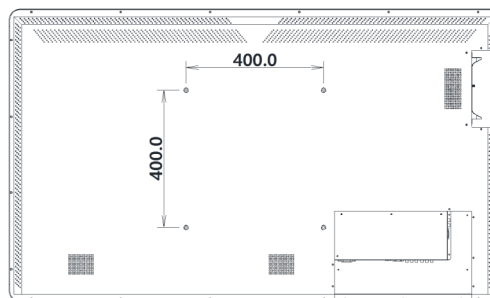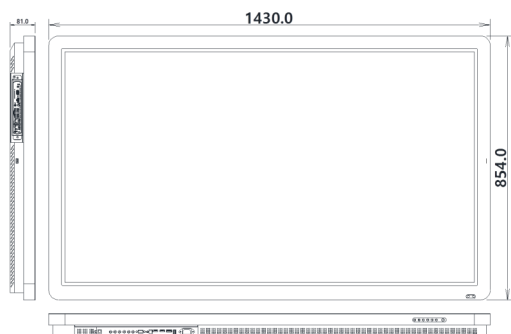

70"

